



TT 515-A

PROFESSIONAL ACTIVE SPEAKER



Description

Flexibility, power, and compactness make the TT 515-A ideal for installed and portable professional applications where size and weight are critical factors. This approach combines the advantages of TT+ technology such as controlled dispersion, outstanding clarity and extreme power, multiple flexible rigging accessories, weatherproof protection, and RDNET real-time monitoring and management software with recallable presets. Its transducer configuration pairs two custom-loaded 5-inch cone drivers to a rotatable CMD waveguide surrounding a titanium 1.75-inch high-frequency compression driver. Whether it's used as a compact main system, as fills, or surrounds in a larger system, TT 515-A is quick to deploy and fast to tune.

Features

- › 127 dB max SPL
- › 100° x 70° coverage
- › LF 2 x 5" neodymium woofer, 2" voice coil
- › HF 1.75" titanium comp. driver
- › 2 x Class-D amplifiers, 1000 Watts RMS total power
- › 70 - 20.000 Hz frequency range
- › RDNET on board
- › FIRPHASE and Bass Motion Control

Part Number

13000686 TT 515-A
13000719 TT 515-A

220-240 V
115 V

Black
Black


EAN 8024530019471
EAN 8024530019594



TT 515-A

PROFESSIONAL ACTIVE SPEAKER

Line Art 2D

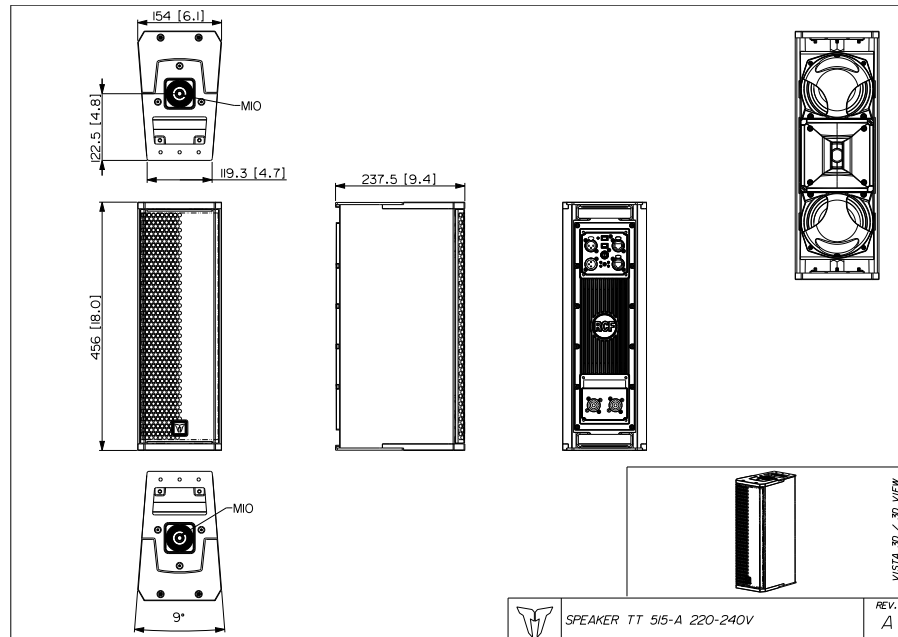

SPEAKER TT 515-A 220-240V

REV. A

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	70 Hz ÷ 20000 Hz
	Max SPL @ 1m	127 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	70°
Transducers	Compression Driver	1 x 1.0" neo, 1.75" v.c
	Woofer	2 x 5.0" neo, 2.0" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Crossover Frequencies	1200
	Protections	Excurs.
	Limiter	Fast Limiter
	Controls	Bypass, Linear/High Pass, Volume, RDnet on board
	RDNet	Onboard
Power section	Total Power	2000 W Peak, 1000 W RMS
	High frequencies	600 W Peak, 300 W RMS
	Low frequencies	1400 W Peak, 700 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	2X M10 TOP AND BOTTOM 2X PIN D.10
	Handles	2 TOP AND BOTTOM
	Grille	Steel
	Color	Black



TT 515-A

PROFESSIONAL ACTIVE SPEAKER

Size / Weight	Height	456 mm / 17.95 inches	
	Width	154 mm / 6.06 inches	
	Depth	237.5 mm / 9.35 inches	
	Weight	9.8 kg / 21.61 lbs	
Rigging / Mounting	ACCESSORIES		
	FLOOR STANDS		
	13360109 AC PRO-FS	Black	EAN 8024530006471
	FLYING BRACKETS		
	13360485 FL-BR TT 515	Black	EAN 8024530018924
	HORIZONTAL BRACKETS		
	13360459 H-BR TT 515	Black	EAN 8024530018948
	LINK BARS		
	13360501 FL-B LINK TT 515		EAN 8024530019808
	POLE MOUNT KITS		
	13360232 AC PMX		EAN 8024530010058
	13360110 AC PRO-PM	Black	EAN 8024530006488
	13360678 PMK60678	Black	EAN 8024530022563
	13360679 PMK60679	White	EAN 8024530022570
	13360067 PM-KIT M20	Black	EAN 8024530014599
	13360458 PM-KIT TT 515	Black	EAN 8024530018955
	VERTICAL BRACKETS		
13360484 V-BR TT 515	Black	EAN 8024530018931	
Protections	BAGS		
	13360482 CVR TT 515	Black	EAN 8024530019891
Cables	RAIN PROTECTIONS		
	13360381 RP 1X HDL 6	Black	EAN 8024530015169
	CABLES KIT		
	13360102 AC XLR 3M3F		EAN 8024530006402