



TT 808-AS

PROFESSIONAL ACTIVE SUBWOOFER



Description

TT 808-AS is a compact low-profile high-performance active subwoofer. It features two vented-loaded 8" cone woofers powered by a 1000 Watts two-channel amplifier -one for each woofer- on a baltic birch plywood cabinet painted with black polyurea and weatherproof treatment. Management and tuning are available via RDNet software or using the two preset buttons, a polarity button, and a variable delay accessible from the back panel. The cabinet features rubber feet on two sides and two threaded pole-mounts for horizontal and vertical placement. Two stabilizing brackets make the vertical placement stable and firm. TT 808-AS can be used stand-alone, in subwoofer arrays, or as the low-frequency complement for TT 515-A speaker.

Features

- › 129 dB max SPL
- › 40 Hz to 400 Hz frequency range
- › 1000 W RMS Class-D Amplifier
- › 2 x 8" neodymium woofers, 2.5" v.c
- › RDNet on board
- › Bass Motion Control excursion management
- › Flexible Rigging
- › Rotatable TT+ Logo

Part Number


13000693 TT 808-AS	220-240 V	Black	EAN 8024530019532
13000731 TT 808-AS	115 V	Black	EAN 8024530019600



TT 808-AS

PROFESSIONAL ACTIVE SUBWOOFER

Line Art 2D

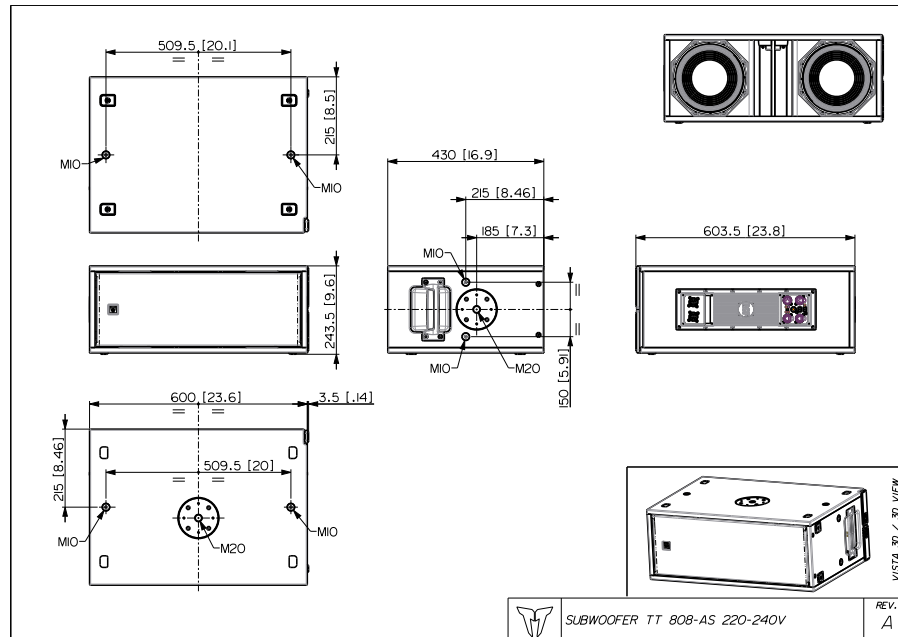

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response	40 Hz ÷ 400 Hz
	Max SPL @ 1m	129 dB
Transducers	Woofer	2 x 8" neo, 2.5" v.c
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR, RDNet Ethercon
	Output connectors	XLR, RDNet Ethercon
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Protections	Excurs.
	Limiter	Fast Limiter
	Controls	Gain, Equalization, ByPass on board
	RDNet	Onboard
Power section	Total Power	2000 W Peak, 1000 W RMS
	Low frequencies	2000 W Peak, 1000 W RMS
	Cooling	Convection
	Connections	Powercon IN/OUT
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	Baltic birch plywood
	Hardware	2X M20 TOP AND SIDE 8X M10 2X SIDE
	Handles	1 X SIDE
	Grille	Steel
	Color	Black
Size / Weight	Height	243.5 mm / 9.59 inches
	Width	603.5 mm / 23.76 inches
	Depth	430 mm / 16.93 inches
	Weight	20 kg / 44.09 lbs

ACCESSORIES

Rigging / Mounting
POLE MOUNT KITS
 13360232 AC PMX

EAN 8024530010058



TT 808-AS

PROFESSIONAL ACTIVE SUBWOOFER

Rigging / Mounting	13360067 PM-KIT M20	Black	EAN 8024530014599
	VERTICAL BRACKETS		
	13360500 V-BR TT 808	Black	EAN 8024530019792
Protections	COVERS		
	13360486 CVR TT 808	Black	EAN 8024530019907
	RAIN PROTECTIONS		
	13360381 RP 1X HDL 6	Black	EAN 8024530015169
Cables	CABLES KIT		
	13360102 AC XLR 3M3F		EAN 8024530006402