



Scan for full manual

## Kramer Cable Guard Quick Start Guide



This guide helps you install and use your **Kramer Cable Guard** for the first time.

Go to [www.kramerav.com/downloads/Kramer Cable Guard](http://www.kramerav.com/downloads/Kramer_Cable_Guard) to download the latest user manual and check if firmware upgrades are available.

### Step 1: Check what's in the box

- ✔ Kramer Cable Guard
- ✔ 4 M4x25 Fully threaded screws for wood
- ✔ 1 Quick start guide

### Step 2: Get to know your Kramer Cable Guard

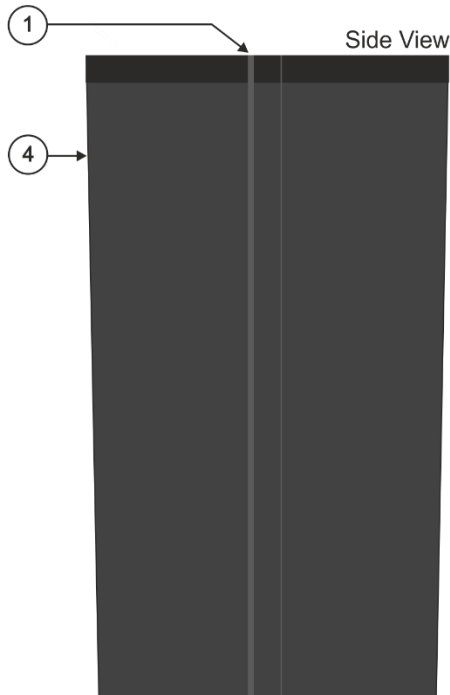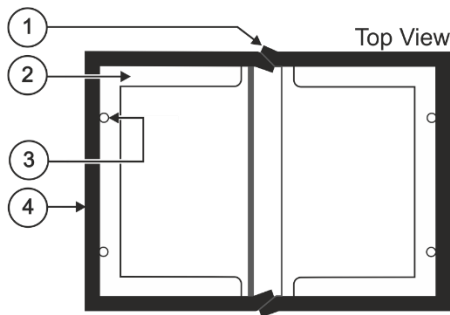

#	Feature	Function
1	Hook-and-loop Fastener	Runs from one side of the guard to the other, enabling cable pass-through wherever needed.
2	Wooden Frame	Cable guard frame attached to the underside of the table.
3	Wooden Screw Openings	Attach the wooden frame using the 4 screws supplied with the package.
4	Cable Guard	Polyester black bag for protecting cables running under a table (for example from a TBUS installation).

#### Specifications

Material	Wooden Frame	With 4 screw holes for attaching under a table
	Polyester Bag with a Hook-and-loop fastener	100% Polyester PU coated 600D Oxford fabric
Environmental Conditions	Operating Temperature	0° to +40°C (32° to 104°F)
	Storage Temperature	-40° to +70°C (-40° to 158°F)
	Humidity	10% to 90%, RHL non-condensing
Dimensions	Net Dimensions (W, D, H)	29cm x 23cm x 45cm (11.4" x 9.1" x 17.7")
	Shipping Dimensions (W, D, H)	51.5cm x 24.5cm x 3.5cm (20.3" x 9.7" x 1.4")
	Net Weight	0.4kg (0.9lbs)
	Shipping Weight	0.4kg (0.9lbs)

## Step 3: Install the Kramer Cable Guard

Before installing **Kramer Cable Guard**, you need to configure and mount a Kramer TBUS onto a table.

### To attach the Kramer Cable Guard to the underside of a table:

1. Place the **Kramer Cable Guard** around the TBUS under the table.  
If required, open the top part of the Hook-and-loop fastener to fit the material around the TBUS body.
2. Pass the 4 screws through the screw openings and tighten them to fix the **Kramer Cable Guard** under the table.



Take care not to damage the table. Kramer Electronics is not responsible for any damage caused to the table.

3. Arrange the cables, running from the TBUS under the table, inside the **Kramer Cable Guard**.
4. Pass the cable ends out the **Kramer Cable Guard** by releasing part of the Hook-and-loop fastener (on the sides or the lower part, as desired), thus creating an opening for the cable to pass through.

