


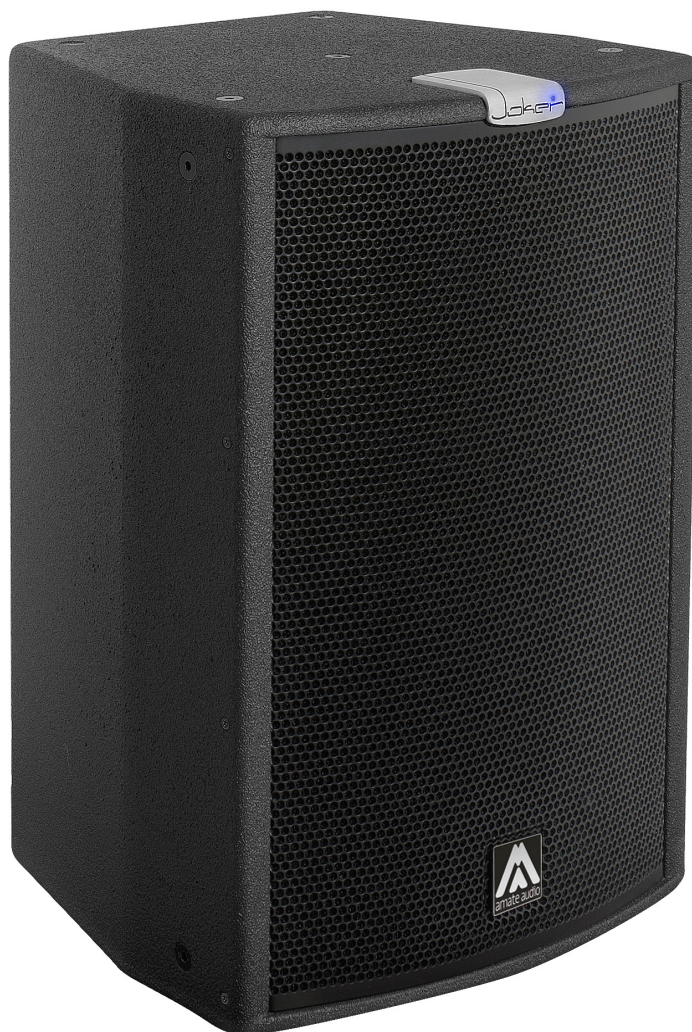

JK10A

Outstanding size to power ratio.
600 W in a reduced 10" format tears down any excuse
to obtain a "big" sound in a reduced size.

Excepcional relación tamaño-potencia.
600 W en un formato de tan solo 10", ya no hay excusa;
el tamaño no es un impedimento para tener un sonido "a lo grande".

JK10A

10" TWO-WAY ACTIVE SPEAKER SYSTEM



Asymmetrical
dispersion
horn



Light neodymium
components




Multiple
PRESETS
available

TECHNICAL FEATURES


JK10A ACTIVE

Amplifier (program power)	500 + 100 W Class D Bi-amplified
Input sensitivity	8 dBu – 1.94 V
Input Impedance	20 kΩ Balanced
Maximum input level	20 dBu
Mains	Universal Switching Power Supply 85-265 V/45-65 Hz
Average current draw	0.7 A (Heavy duty musical program)
SPL (1 m)	124 dB continuous 127 dB peak
Built-in DSP	48 bit
Presets	FLAT / NEARFIELD / NEARFIELD + / LONGTHROW / SPEECH / XOPOLE / XOALL
AD/DA converters	24 bit – 48 kHz
Standby mode consumption	< 5 W
Adjustable Delay line	118 ms / 40 m
Frequency response (-10 dB)	50 Hz – 18 kHz
Components LF-MF HF	10" Neodymium woofer (2.5" voice coil) 1.4" PETP diaphragm driver
Directivity (HxV)	50° to 100° x 55°
Dimensions	539 x 365 x 340 mm
Weight	14.6 kg
Finish	Multilayer plywood 1.5 mm optimized steel grille with foam High resistant bi-component black Polyurea® coating


FREQUENCY RESPONSE 1W/1m (FLAT PRESET)

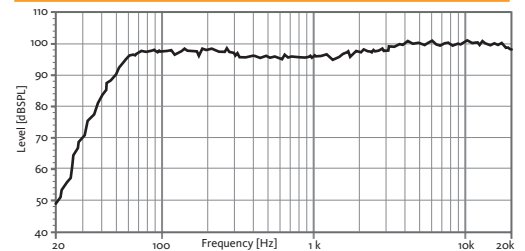

HORIZONTAL COVERAGE

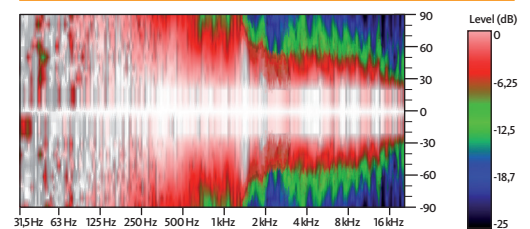

VERTICAL COVERAGE

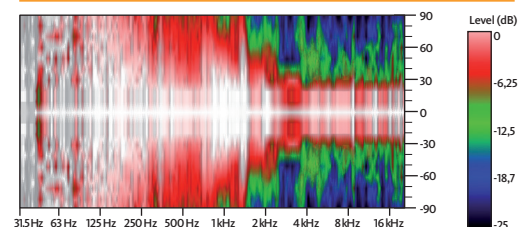


JK10A




REAR VIEW


ACCESSORIES




FC-JK10




NC-JK10




SP-35




UB-L




HR-10



GT-50HR



SP/CRTL



SC-15



ACR-M8